


# Engineered. Tested. Certified.



## UL Certified All Stainless Steel Flexible Connectors

- UL Rated 150 psig up to 8 feet overall length for all diameters
- Service temperature range: -320°F to 1500°F
- Meets ULC536 Standard
- All stainless steel construction
- Inherent hoop strength of convoluted hose allows full vacuum service without collapsing
- Minimum 5 to 1 safety factor
- Lay line for safe and easy installation






## UL Certified All Stainless Steel Flexible Connector for Flammable Liquids Service

- UL Listed for Above and Under Ground Installations
- UL Listing Number: CMH-1561
- FLEX-PRESSION meets ULC536 Standard
- Individually inspected and pressure tested in accordance with CSA B51 and ASME Codes
- Connectors are serialized providing 100% traceability for quality assurance



Max. Working Pressure	150 PSIG
Min. Burst Pressure	750 PSIG
Test Pressure	165 PSIG

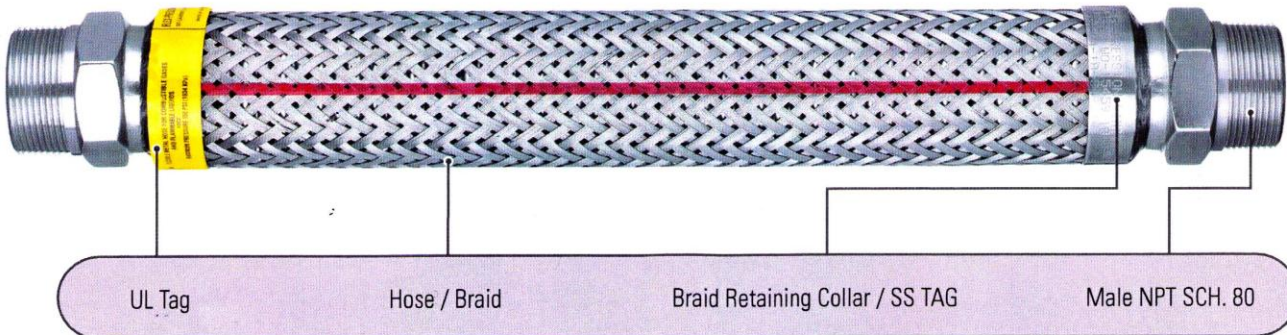

Product Designation	Size	Length in inches	End Fitting Material
UFP (M) Male NPT	12 = 3/4"	Length in inches	304SS = S4
UFP (H) Male NPT Hex	16 = 1"		
	24 = 1 1/2"		
	32 = 2"		
	48 = 3"		

Sample Order: UFPH-16-48-S4 = 1" x 48" OAL w/Male Hex SS304

**FLEX PRESSION LTD.**  
 6590 Abrams  
 Ville St. Laurent, Quebec  
 H4S 1Y2  
 T (514) 334-9888  
 F (514) 334-1044

**FLEX PRESSION LTD. (Ontario)**  
 2244 Drew Road Units 4 & 5  
 Mississauga, ON L5S 1B1  
 P 905-671-2244 F 905-671-1857

### OTHER PRODUCTS

Metal hose, Braid, Metal hose assemblies, Teflon hose assemblies, expansion joints of all types and Tygon tubing.

MADE IN CANADA

flexpression.com